



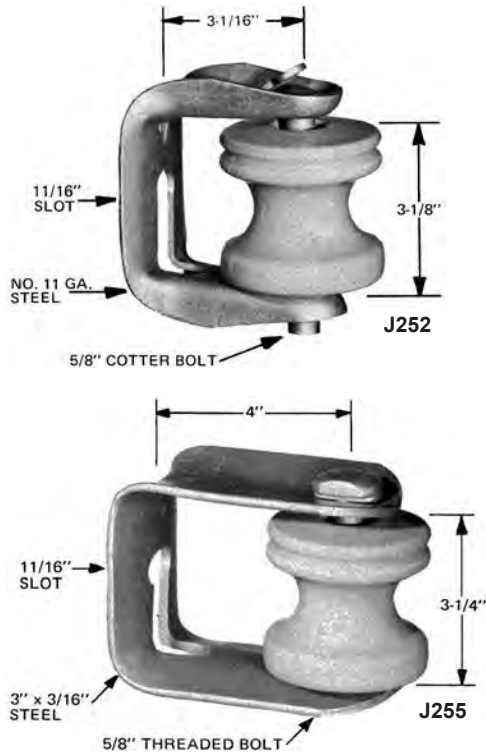

Clevises

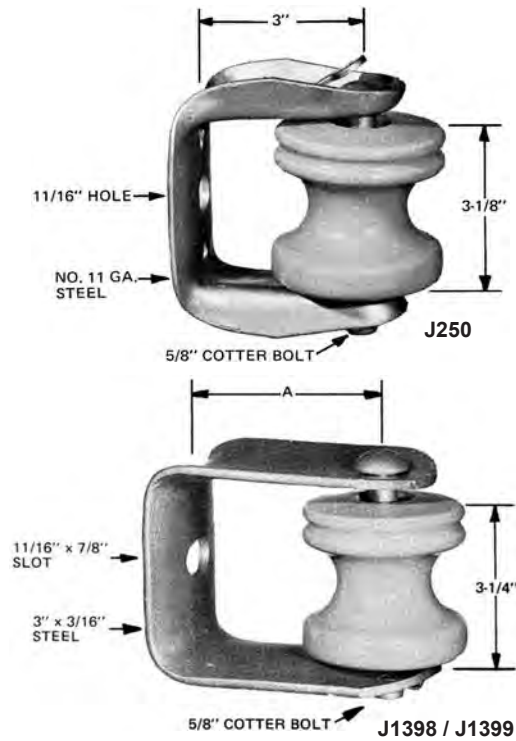

Insulated Secondary & Deadend

Features

- The J250 has two sharp projections in the back to prevent it from twisting
- The cotter belt is held in position by means of the same type of tab that is used on the J252

Material

Steel hot dip galvanized

Catalog Number	A	For use w/Insulator Catalog	Weight /100 (lbs)
J250		J151 or J101	152
J1398	3 1/2	J151 or J101	240
J1399	4	J151 or J101	254

Insulated Secondary & Deadend

The J252 and J255 Secondary Pulley Brackets are designed for use both as stringing pulleys and as secondary clevises, making them especially useful for stringing and sagging conductors.

The conductor is strung and sagged with the bracket in the pulley position where it cannot bind. The 90° slot in the base makes it possible to rotate the bracket into the clevis position before or after the conductor is tied to the spool.

Features

- J252 light-type has a metal tab which contains the insulator bolt
- The cotter bolt of the J255 heavy duty-type threads into the bottom of the clevis, locking the special Twist-Lock head into a groove in the clevis top
- Both features eliminate the cotter pin

Material

Steel hot dip galvanized

Catalog Number	For use w/Insulator Catalog	Width	Weight /100 (lbs)
J252	J151 or J101	2 5/8	150
J255	J151 or J101 or J0101	3	256

